

ASSEMBLY AND INSTRUCTION MANUAL

MODEL OD2212 KAYA

© 2022 KURT BEIER & KATI QUINGER



Metal frame, matt black
fine structure coated



Armrest and back
completely foldable




With practical shelf
due to lateral seat adjustment

Use of back- and armrest function


Adjustment of back slant:

1. To adjust the desired position grip the back from the outside and pull it carefully into your direction.

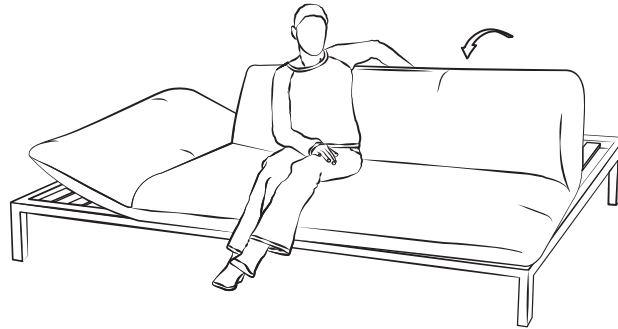


2. To obtain zero position pull the back carefully beyond the top position into your direction and fold down into zero position.

3. From zero position you can easily snap the back into desired position.

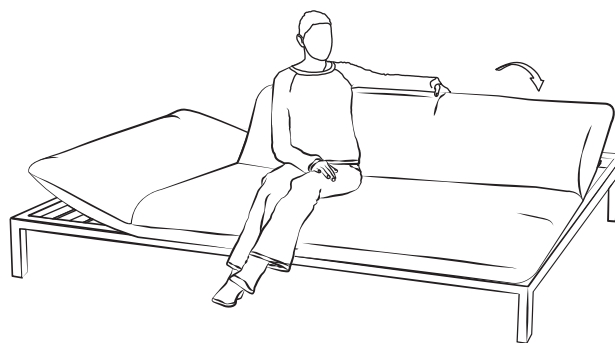

To adjust armrest, proceed the same way.


Kaya does not need connectors to build a corner group.

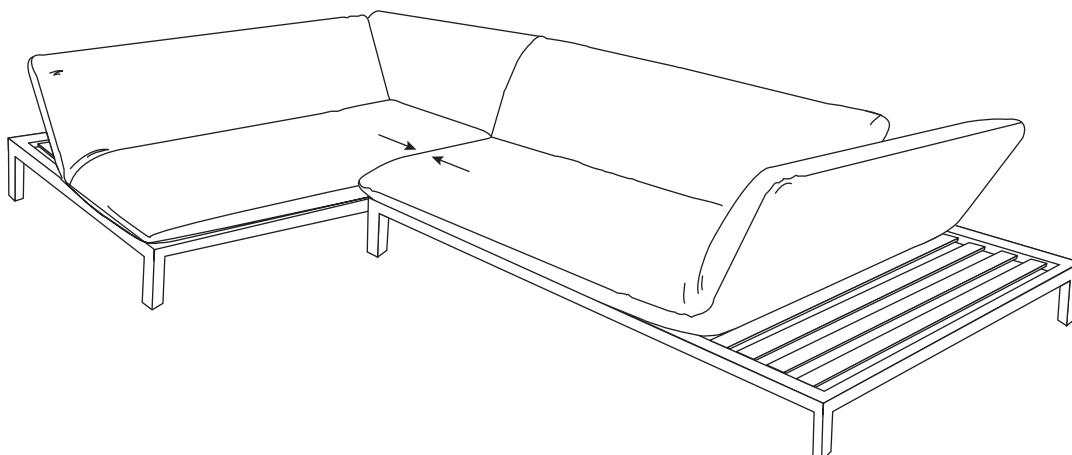


ATTENTION!

DON'T SIT DOWN ON BACK OR ARMREST EXCEPT THEY ARE AT LOWEST POSITION.


FUNKI - how it works:




1. Take the cushion at its upper side and put the cushion on your knees with the zipper on the bottom. The seamless side faces you.



2. Move the upper part of the cushion towards yourself until the final position is reached.



3. Now you are able to move the upper part backwards until the upper part of the cushion will click into place in the zero position.



4. Now put the cushion in the preferred position (e.g. in the back, seamless side at the front and zipper at the bottom). You are able to choose different locking positions depending on your preference and position by slowly pulling the upper part of the cushion towards yourself.

Connector clips:

1. Push 2 elements together.
2. Connect the frames of the elements with 2 connector clips (a) from above.

